


Acoplamento WPFlex - Tipo R10

WPFlex Coupling - Type R10

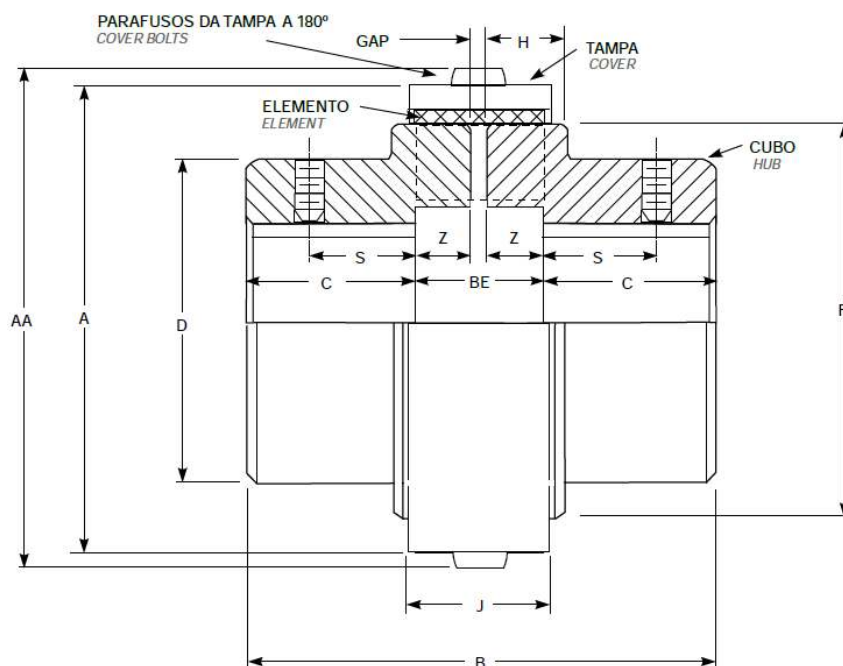

Tam. Size	Dimensões / Dimensions																									
	Torque Nom. Rated Torque (Nm)	Rot. Max. Rot.	Furo Max. Max. Bore	Furo Max. Max. Bore	Furo Max. Max. Bore	Peso do acoplamento sem furo (kg) Coupl. weight w/o bore	A				AA		B	BE	C	D	F	H	J		S	Z	GAP	Parafusos das tampas Cover Bolts		
							Tampa Pu. Cover	Tampa Aço Steel Cover	Tampa Pu. Cover	Tampa Aço Steel Cover	Tampa Pu. Cover	Tampa Aço Steel Cover							Tampa Pu. Cover	Tampa Aço Steel Cover				Tampa Pu. Cover	Tampa Aço Steel Cover	
Conv.	Linha R R Line	2	(rpm)	(mm)	(Poi.)																			Tam. Size	Chave Allen Wrench Torque	
5R	62	74	4500	38,00	30	1.625	1,34	1,48	76,5	76,5	80,5	80,4	72,0	20,0	26,0	60,0	64	15,0	23,0	23,0	15,9	9,0	2,00	M4	M2,5	
10R	130	156	4500	48,00	37	1.875	2,48	2,70	90,5	90,5	94,5	94,4	92,0	24,0	34,0	72,0	76	19,0	28,0	28,0	22,2	11,0	2,00	M4	M2,5	
20R	320	384	4500	60,00	49	2.375	5,62	6,07	126,0	124,0	132,1	130,1	122,0	32,0	45,0	92,0	102	25,0	37,1	37,1	25,4	15,0	2,00	M6	M4	
30R	520	624	4500	65,00	54	2.875	9,37	10,0	146,5	143,0	152,6	149,1	152,0	36,0	58,0	105,0	118	29,0	42,0	42,0	31,8	17,0	2,00	M6	M4	
40R	1030	1236	3600	85,00	67	3.375	17,1	18,1	182,4	177,0	190,0	185,0	181,0	47,0	67,0	130,0	150	34,0	54,5	54,5	41,3	21,0	5,00	M8	M5	
50R	2500	3000	3000	105,00	91	4.125	35,7	37,6	231,0	224,0	239,0	232,0	215,0	61,0	77,0	178,0	190	46,0	69,5	69,5	44,5	28,0	5,00	M8	M5	
60R	4000	4800	2500	135,00	131	5.250	-----	66,2	-----	267,0	-----	278,0	275,4	75,4	100,0	209,6	228	602	67,0	67,0	-----	35,2	5,00	M10	M6	
70R	8000	9600	2100	160,00	155	6.125	-----	111	-----	310,0	-----	321,0	324,4	84,4	120,0	250,8	270	69,7	75,0	75,0	-----	39,7	5,00	M10	M6	
80R	15000	18000	1800	190,00	184	7.250	-----	165	-----	370,0	-----	381,0	376,8	96,8	140,0	270,0	328	83,4	85,0	85,0	-----	45,4	6,00	M10	M6	

6 8 9 10

Vide Notas de Referências na página 07.

See Reference Notes on page 07.

2 Elemento reforçado para elevar a capacidade de transmissão.