






Acoplamentos Tipo Pneu




NORMAL



MISTO / MIXED



INVERTIDO / REVERSED




INTEGRAL

Tam. Size	Torque Nominal (Nm) Rated Torque		Rotação Máxima Max. Rotation		Momento de Inércia (CN) Moment of Inertia	Momento de Inércia (CI) Moment of Inertia	Massa com cubo normal Mass with Hub normal	Massa com cubo integral Mass with Hub integral	Furo Máximo mm		Øl máx.
	Convencional Conventional	Linha 'R' R'Line	normal (rpm)	CE(rpm)	kgm2	kgm2	kg	kg	ØC min.	ØC máx.	
25	45	56	5000	---	0,000483	0,00071	0,515	0,815	10	24	32
35	90	112	4000	5000	0,001928	0,00277	1,189	1,845	10	32	45
50	340	425	3600	5000	0,00682	0,01017	2,58	4,77	20	46	60
70	940	1175	3250	4000	0,0298	0,0468	7,03	10,72	25	65	90
90	1700	2125	2000	3600	0,111	0,1503	13,66	19,79	30	85	100
105	2500	3125	2000	3600	0,1585	0,225	20,7	28,7	40	100	130
140/100	6800	8500	1400	2500	0,483	0,841	35	65,9	75	100	170
140/140	6800	8500	1400	2500	0,568	0,89	47,2	71,1	75	140	170
200/90	20150	25180	1000	1500	2,66	3,74	68,3	122	70	90	240
200/140	20150	25180	1000	1500	2,74	4,22	80	146,5	110	140	240
200/200	20150	25180	1000	1500	9	13,87	112,6	177,2	130	200	240
300/150	68900	84400	720	1200	8,89	9,28	126,2	288	100	150	-
300/200	68900	84400	720	1200	8,85	9,28	148,8	344	100	200	-
300/250	68900	84400	720	1200	11,46	18,94	265	434	140	250	-
300/300	68900	84400	720	1200	12,92	18,94	307	434	140	300	-

Tam. Size	E	D	G	GAP Max.	B	F	B1	A	J	Desalinhamento máximo (mm) Maximum misalignment		Toque de ajuste* dos parafusos em (Kgm) *Tightening torque of bolts	
										Axial	Radial	1º ajuste 1st adjustment	2º ajuste 2nd adjustment
25	74	36	30	55	80	25	62	95	66	0,5	0,25	0,5	0,5
35	96	49	40	75	110	35	85	125	86	0,75	0,4	0,75	1,25
50	127	70	50	100	150	50	111,5	165	120	1,25	0,5	1,25	2
70	169	99	65	135	205	70	149,5	220	150	1,5	0,8	2	2,5
90	218	116	90	170	250	80	188	300	180	2	1,25	5	6
105	235	144	90	190	290	100	210	335	200	2	1,25	5	6
140/100	288,5	150	120	220	320	100	242,5	405	265	3	2	6	7
140/140	288,5	195	120	250	380	130	272,5	405	265	3	2	6	7
200/90	436	150	185	285	385	100	313	550	380	4	3	10	15
200/140	436	195	185	315	445	130	343	550	380	4	3	10	15
200/200	436	276	185	365	545	180	393	550	380	4	3	10	15
300/150	535	225	235	395	553	159	435	730	490	4	3	15	22
300/200	535	290	235	435	635	200	475	730	490	4	3	15	22
300/250	535	350	235	510	785	275	consultar	730	490	4	3	15	22
300/300	535	390	235	510	785	275	consultar	730	490	4	3	15	22

Acoplamentos Tipo Pneu- Bipartido

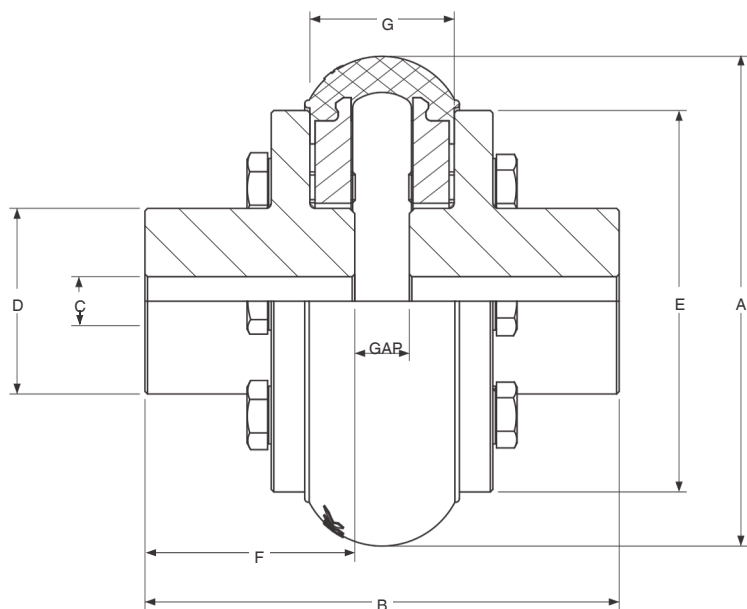

Tam. Size	Torque Nominal Rated Torque		Rotação Máxima Max. Rotation (rpm)	Momento de Inércia Moment of Inertia (Kgm ²)	Massa Mass (Kg)	Furo Máximo mm	
	Convencio. (Nm) Conventi.	Linha "R" "R" Line ^z				ØC min. (mm)	ØC max. (mm)
25BP	39	47	4000	0,000483	1,25	9	24
35BP	78	93	3800	0,001928	2.50	9	32
50BP	297	354	3600	0,00682	5.50	20	48
70BP	822	979	3600	0,0298	14.50	25	70
90BP	1487	1771	2000	0,111	28.10	30	85
105BP	2187	2604	2000	0,1585	40.70	35	110
140BP	5950	7083	1890	0,483	75	40	145
200/90BP	17125	20983	1200	7,48	161	70	90
200/140BP	17125	20983	1200	8,44	176	80	140
300/150BP	58500	70333	700	17,78	285	100	150

^z Elemento reforçado para elevar a capacidade de transmissão.
Reinforced element to increase transmission capacity.

Tam. Size	E	D	G	B	F	A	GAP Padrão Standard GAP	GAP Máximo Max. GAP	Desalinhamento máximo Maximum misalignment (mm)		Toque de ajuste dos parafusos em (Kgm) Tightening torque of bolts	
									Axial	Radial	1° Ajuste 1st adjustment	2° Ajuste 2st adjustment
25BP	74	36	30	63	30	95	3	33	0,5	0,35	0,5	0,5
35BP	96	49	40	80	38,5	125	3	41,5	0,75	0,5	0,75	1
50BP	127	70	50	103	50	165	3	53	1,25	0,65	1	2
70BP	169	99	65	143	70	220	3	73	1,5	1	2	2,5
90BP	218	116	90	165	80	300	5	85	2	1,2	5	6
105BP	235	144	90	205	100	335	5	105	2	1,2	5	6
140BP	288,5	195	120	265	130	405	5	135	3	2,4	6	7
200/90BP	436	150	185	297	128,5	550	40	168	4	3,5	10	15
200/140BP	436	198	185	317	130	550	57	185	4	3,5	10	15
300/150BP	535	229	235	410	175	730	60	235	4	3,5	10	22